



Complete Tile Fixing Solution



GROUT ADMIXTURE


A MIXTURE WHICH HELPS TO IMPROVE THE STRENGTH OF GROUT.




**Latest Technology
Value For Money**



Durability



Reliability



**Resists Algae &
Fungus Growth**




Home Pride Grout Admixture

HAD-1 For Extra Hardness



Application of Grout Admixture with H.P Grout in Grout Joints

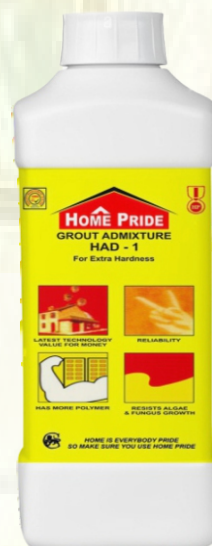

Description

Home Pride Grout Admixture is white synthetic polymer modified with other chemical to produce liquid Admixture . which when mixed with sanded and unsanded cementitious grout gives high Adhesion strength ,non porous, reduces the water permeability of the grouts. Which exceeds strength of normal grout and makes grout water repellent, flexible & Non porous grouts.

Technical Specification

Physical Property	Liquid
Colour	White
Viscosity	More than water at 27°C
Specific Gravity	1.020 + 0.0001
Packing Size	100ml,200ml,400ml,5 ltr ,20ltr
Mixing	300-400ml in 1 Kg H.P Grout
Setting Time	Dose not alter of H.P Grout
VOC Content	1.04 g/L
Compressive Strength	Increase in Compressive strength of H.P Grout
Coverage	Varies by application
Frequently uses	sanded and unsanded grouts
Other	Achieve Water proofing Prop.

Advantage

Colour fast , flexible , easy to clean .
 Increase comprehensive strength
 Improve the Adhesion Strength
 Shock and chemical resistant
 Suitable for submerged conditions
 Increase the Abrasion resistance of grout
 Reduced water absorption
 Suitable for interior and exteriors use .
 Provide smooth and uniform joints
 Polymer based tile joint filler
 No water leakage
 Its improves the performance of cement grout

Application

- 1- It shall be ensured that areas to be grouted are clean, sound .
- 2- Add 300 – 400 ml of had-1 admix per kg Home Pride Grout and mix well to obtain a smooth and uniform past .



Home Pride Grout Admixture

HAD-1 For Extra Hardness

- 3- Apply mixture to the surface and work it well into the joints insuring that they are completely filled.
- 4- Remove excess grout while working diagonally over the area to be grouted .
- 5- Grout mixed with Grout Admix should be removed from tools and equipment with clean water immediately after use.

Packing Size

100 ml ,200ml , 400 ml ,5 ltr ., 20 ltr .

Feature

Can also be used as primer for dry wall board for Tiling and Screed

Storage & Shelf Life

Home Pride Grout Admix has a shelf life 12 months if kept in its original packing and normal dry conditions . High Temperature storage may reduce this period.

Health & Safety

Contact with the skin and eyes, or inhalation of dust should be avoided. Suitable protective clothing ,gloves eye/face protection and dust mask should be worn . in case of contact with skin , it shall be rinsed immediately with plenty of water and medical attention shall be sought immediately.

Additional Information

“Home Pride Adhesive Pvt. Ltd., “ also supplies other construction chemicals (Tile Adhesive , HP Putty , Epoxy Grout , Cementitious Grout, Floor Hardener , HPCG) and Tile Cleaner , Marvel Cleaner , Tap Cleaner , Tile Spacer and variety of products.

Warranty

Home Pride Adhesive Pvt. Ltd., Strive to ensure that any advice, Information or Recommendation given are appropriate and correct , it cannot accept any liability directly or indirectly arising out of the products, since the method and place of application of the product are beyond its control. Its guarantee is therefore limited to the quality of materials delivered.

Smart Support

Home Pride Adhesive .Pvt.Ltd.

An ISI Certified company

F.429,Phase-1 , RIICO Industrial area ,
Bhiwadi (Alwar, Raj.)

Branch Office M/s Home Pride Adhesive .Pvt.Ltd
Pole no. 1896 – 1897 , New Mandoli Industrial
Area Delhi – 110093

Website : www.homepride.in

E-Mail . : homeprideadhesive@gmail.com

Mob. No -9810470965 , 9887723198,9917245684 .

Toll free : 1800 111 818

