


GROUT COLOURS



Complete Tile Fixing Solution

Na Tile
Tote.
Na Dil.

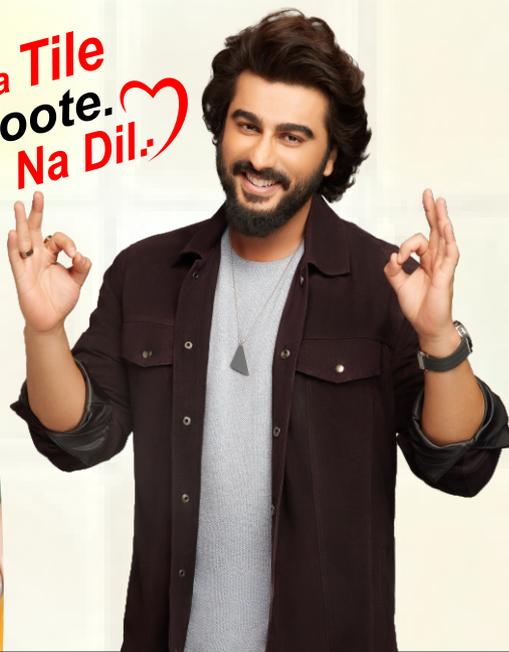

Complete Tile Fixing Solution

Cement Grout

Home Pride grout is polymer modified cementitious water repellent grout which can be used in interior and exterior area.

Home Pride unsanded grout is designed for joint width 1 to 3 mm for porous absorbent type tiles, non vitreous clay tiles, marble & glazed wall tiles. For gap wider than 3 mm use HOME PRIDE sanded grout.

Home Pride is a superior quality cementitious grout with hydrophobic properties that allow tile grouts to resist water.

Coverage :

Approximate sq. ft. coverage per 10 kg. bag of Home Pride unsanded.

Tile Dimension (mm)			Joint/ Grouting Width							
Length	Width	Thickness	2	3	4	5	6	8	10	12
300	200	6	79.9	53.3	40.0	32.0	26.6	20.0	16.0	13.3
300	300	6	99.9	66.6	50.0	40.0	33.3	25.0	20.0	16.7
450	300	6	119.9	79.9	59.9	48.0	40.0	30.0	24.0	20.0
600	300	6	133.2	88.8	66.6	53.3	44.4	33.3	26.6	22.2
600	600	8	149.9	99.9	74.9	59.9	50.0	37.5	30.0	25.0
800	800	8	199.8	133.2	99.9	79.9	66.6	50.0	40.0	33.3
1000	1000	10	199.8	133.2	99.9	79.9	66.6	50.0	40.0	33.3
1200	600	10	159.9	106.6	79.9	63.9	53.3	40.0	32.0	26.6
1200	800	10	191.8	127.9	95.9	76.7	63.9	48.0	38.4	32.0
1200	1200	12	199.8	133.2	99.9	79.9	66.6	50.0	40.0	33.3
1600	800	12	177.6	118.4	88.8	71.1	59.2	44.4	35.5	29.6
1800	1200	12	139.8	159.9	119.9	95.9	79.9	59.9	48.0	40.0
25	25	6	8.3	5.6	4.2	3.3	2.8	2.1	1.7	1.4
25	50	6	11.1	7.4	5.6	4.4	3.7	2.8	2.2	1.9
50	50	6	16.7	11.1	8.3	6.7	5.6	4.2	3.3	2.8
100	100	6	33.3	22.2	16.7	13.3	11.1	8.3	6.7	5.6
100	100	10	20.0	13.3	10.0	8.0	6.7	5.0	4.0	3.3

Note : Coverage shown are approximate and are given for estimation purposes only. Actual job site coverage may vary. Please take 10% to 15% additional material for wastage, spillage and application condition.



UNSANDED GROUT

SANDED GROUT



EPOXY GROUT

EPOXY GLITTER GROUT



HOME PRIDE ADHESIVE PVT. LTD.

Plant 1 :- F-429, Phase I, RIICO, Industrial Area, Bhiwadi, Rajasthan, RJ-301019

Plant 2 :- A-145 (A), Phase I, RIICO, Industrial Area, Bhiwadi, Rajasthan, RJ-301019

Customer Care No. : 1800 11 1818

Website : www.homepride.in

E-mail : homeprideadhesive@gmail.com



Complete Tile Fixing Solution

Epoxy Grout

Epoxy Grout is a specially formulated to give high strength, stain free & chemical resistant grout. For use with ceramic tiles, vitrified tiles, marbles & stones.

Features :

- Home Pride colour epoxy is a chemical resistant grout for heavy duty applications.
- Recommended for areas where hygiene is of utmost importance.
- Internal & external wall and floor application.
- Wet areas : swimming pools, bathrooms.
- Chemical industries : laboratories, production and storage workshops, food industries, breweries, commercial kitchens and dairies.
- Hospitals : operation theaters, clinics.
- Other : garages, battery rooms, public toilets, waste treatment plants, podium, parking areas, high traffic areas.

Mixing :

Resin, hardener and filler mixed together until a slump free and smooth grout is obtained.

Pack Size

	1kg	5kg
(a) Resin	200 gm	1kg
(b) Hardener	100 gm	0.5 kg
(c) Filler	700 gm	3.5 kg

Coverage

Approximate sq. ft. coverage per 1 kg. pack.

Tile Dimension (mm)			Joint/ Grouting Width							
Length	Width	Thickness	2	3	4	5	6	8	10	12
300	200	6	61.5	41.0	30.7	24.6	20.5	15.4	12.3	10.2
300	300	6	76.9	51.2	38.4	30.7	25.6	19.2	15.4	12.8
450	300	6	92.2	61.5	46.1	36.9	30.7	23.1	18.4	15.4
600	300	6	102.5	68.3	51.2	41.0	34.2	25.6	20.5	17.1
600	600	8	115.3	76.9	57.6	46.1	38.4	28.8	30.1	19.2
800	800	8	153.7	102.5	76.9	61.5	51.2	38.4	30.7	25.6
1000	1000	10	153.7	102.5	76.9	61.5	51.2	38.4	30.7	25.6
1200	600	10	123.0	82.0	61.5	49.2	41.0	30.7	24.6	20.5
1200	800	10	147.6	98.4	73.8	59.0	49.2	36.9	29.5	24.6
1200	1200	12	153.7	102.5	76.9	61.5	51.2	38.4	30.7	25.6
1600	800	12	136.6	91.1	68.3	54.7	45.5	34.2	27.3	22.8
1800	1200	12	184.5	123.0	92.2	73.8	61.5	46.1	36.9	30.7
25	25	6	6.4	4.3	3.2	2.6	2.1	1.6	1.3	1.1
25	50	6	8.5	5.7	4.3	3.4	2.8	2.1	1.7	1.4
50	50	6	12.8	8.5	6.4	5.1	4.3	3.2	2.6	2.1
100	100	6	25.6	17.1	12.8	10.2	8.5	6.4	5.1	4.3
100	100	10	15.4	10.2	7.7	6.1	5.1	3.8	3.1	2.6

Approximate coverage for glass mosaics.

Tile Size	Joint Depth	Joint Depth	Tile grout cementitious = 13 sq. ft./kg
20mmx20mm	1.5mm	2mm	Tile grout epoxy = 14 sq. ft./kg


Note :- Before applying surface should be dry (moisture free).

Typical Applications :

- Ceramic floor & wall tile
- Quarry tile
- Marbles
- Mosaics
- Stones
- Porcelain tile & vitrified tile

Typical Applications :

- Colour fast
- Possesses anti-algae & anti-fungal properties
- Economical in application
- Reduce shrinkage cracks in plaster
- Easy applied and clean up

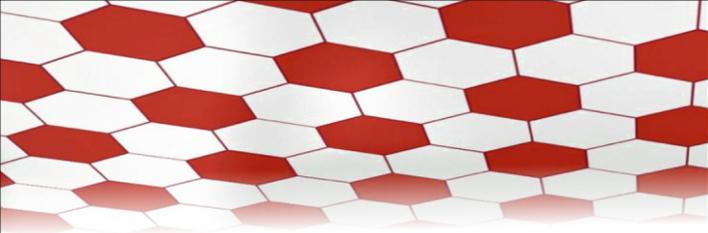

Na Tile
Toote.
Na Dil.



Ivory 101	
Almond 102	
Silk 103	
Beige 104	
Lt. Camel 105	
Antique White 106	
Parchment 107	
Sand Stone 108	
Jaisalmer 109	
Golden Yellow 110	
Golden Brown 111	
Marble Beige 201	

Spectra Pink 202	
Rust 203	
Brown / Quarry Red 204	
Burgandy 205	
Wooden 211	
Mayan Red 206	
Sable / Dark Brown 207	
Mocha 208	
Terracotta 209	
Signal Red 210	
Sky Blue 301	
Smoke Grey 307	

Silver Shadow 306	
Alpine Blue 302	
Slate Grey 308	
Platinum 309	
Raven 310	
Midnight Black 311	
Aquamarine 304	
Dark Green 305	
Sapphire 303	
Natural Silver (Epoxy Only)	
Natural Gold (Epoxy Only)	
Natural Copper (Epoxy Only)	

Shades are for indication purpose only.

